

TYRES


Tora SERIES



SRX 5800/6800 | SN 6800 V


Dimensions (mm)							
TYPE TYRE	G1	I	I (**)	L	M	N	O
260/70 R16	240	2265	2185	1095 to 1180	837 to 924	1105 to 1195	789 to 879
280/70 R18	280	2305	2225	1175 to 1265	893 to 983	823 to 983	1088 to 1163
380/60-15	260	2285	2205	1400	1025	1405	1030
320/65 R18	295	2320	2240	1215 to 1305	1036 to 1191	1225 to 1330	1021 to 1176
7.50X16	260	2285	2205	1020 to 1150	805 to 935	1035 to 1185	820 to 970
210/95 R18	280	2305	2225	985 to 1180	761 to 957	990 to 1205	766 to 981
250/80 R18	280	2305	2225	1060 to 1210	820 to 970	1085 to 1240	845 to 1000
29X12.50-15	240	2265	2185	1230	907	1240	917
31X15.50-15	250	2275	2195	1415	1024	1420	1029
33X15.50-15	270	2295	2215	1415	1024	1420	1029

**HEIGHT WITH CAB

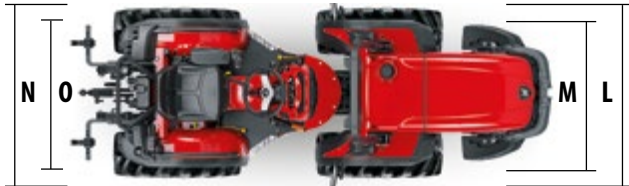

TC 6800 F


Tyres		Dimensions (mm)					
Front	Rear	G1	I	L	M	N	O
8.25-16	280/85 R20	265	2225	1325	1110	1275 to 1445	980 to 1150
250/80-16	320/70 R20	265	2225	1335	1095	1310 to 1475	992 to 1157
280/70 R18	360/70 R20	290	2250	1425 to 1500	1143	1445 to 1505	1088 to 1148

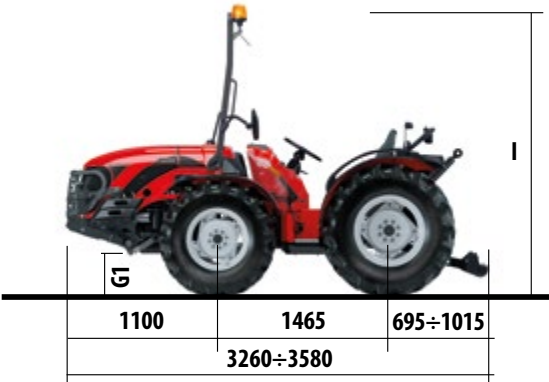

TN 5800 | 6800

Dimensions (mm)							
TYPE TYRE	G1	I	I (**)	L	M	N	O
260/70 R16	240	2200	2135	1305 to 1440	1047 to 1182	1305 to 1395	1047 to 1137
280/70 R18	280	2240	2175	1350 to 1445	1068 to 1163	1370 to 1445	1088 to 1163
320/65 R18	295	2255	2190	1345 to 1500	1036 to 1191	1330 to 1485	1021 to 1176
7.50-16	260	2200	2155	1235 to 1350	1020 to 1135	1185 to 1300	970 to 1085
210/95 R18	280	2240	2175	1190 to 1405	966 to 1181	1200 to 1355	976 to 1131
250/80 R18	280	2240	2175	1225 to 1440	985 to 1200	1240 to 1390	1000 to 1150
29X12.50-15	240	2200	2135	1440	1117	1395	1072
31X15.50-15	250	2210	2145	1545	1154	1565	1174


**HEIGHT WITH CAB

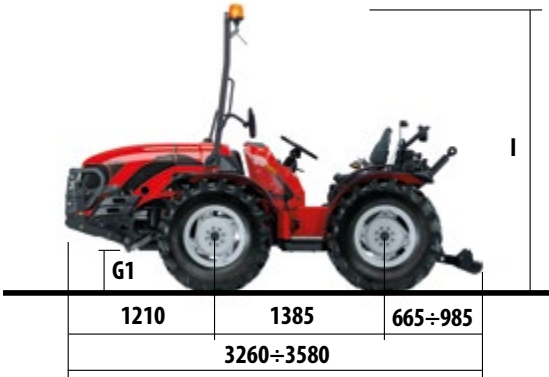

TRX 5800

Dimensions (mm)							
TYPE TYRE	G1	I	I (**)	L	M	N	O
260/70 R16	240	2265	2185	1095 to 1180	837 to 924	1105 to 1195	789 to 879
280/70 R18	280	2305	2225	1175 to 1265	893 to 983	823 to 983	1088 to 1163
380/60-15	260	2285	2205	1400	1025	1405	1030
320/65 R18	295	2320	2240	1215 to 1305	1036 to 1191	1225 to 1330	1021 to 1176
7.50-16	260	2285	2205	1020 to 1150	805 to 935	1035 to 1185	820 to 970
210/95 R18	280	2305	2225	985 to 1180	761 to 957	990 to 1205	766 to 981
250/80 R18	280	2305	2225	1060 to 1210	820 to 970	1085 to 1240	845 to 1000
29X12.50-15	240	2265	2185	1230	907	1240	917
31X15.50-15	250	2275	2195	1415	1024	1420	1029
33X15.50-15	270	2295	2215	1415	1024	1420	1029

**HEIGHT WITH CAB

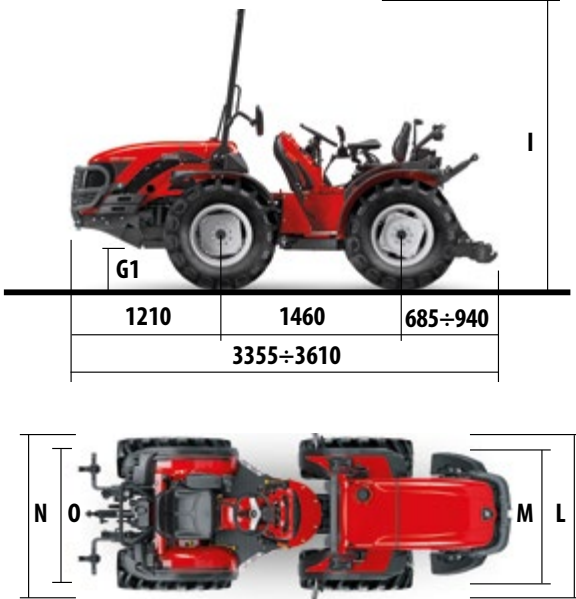

The description and illustrations in this brochure are provided simply for information purposes; they are not binding and may be varied at any time without notice.